

ULTRALIGHT LED

WITH HIGH EFFICIENCY AND COMPACT DESIGN, THE LED ULTRALIGHT ALLOW MOUNTING A LIGHTING SYSTEM IN ANY LOCATION WITH LOW POWER CONSUMPTION, CONNECTED TO ANY MAINS. THEY WORK IN 110 OR 220V AND ALSO FOR CONNECTION TO 12V BATTERY. ARE DIMERIZABLE MANUALLY. THEY ARE OFFERED AS STANDARD MODEL LEDs WITH 5600K° COLOUR TEMPERATURE. THEY ARE ALSO AVAILABLE ORDER WITH LEDs 3200K°. ADAPTERS ARE PROVIDED WITH BUCKETS MOUNTED TRIPOD, WITH VISORS FOR LIGHT BEAM CONTROL AND OFFERED AS ACCESSORY ADDITIONAL A PORTA FILTER TO USE DIFFUSERS OR CONVERTERS TO TUNGSTEN LIGHT.

PRODUCT DESCRIPTION

ULTRALIGHT LED 36W MODEL 53-09 LED

- 12 High Power LEDs 3W.
- Power consumption: 40W.
- Suitable for battery operation (12VDC) and AC 110-240V operation.
- Works automatically AC or DC.
- Local (manual) dimming.
- Dimming 0-100%.
- Colour temperature: 6000K°.
- Options available: 3200K°.



PRODUCT DESCRIPTION


ULTRALIGHT LED 60W MODEL 53-12 LED

- 20 High Power LEDs 3W.
- Power consumption: 65W.
- Suitable for battery operation (12VDC) and AC 110-240V operation.
- Works automatically AC or DC.
- Local (manual) dimming.
- Dimming 0-100%.
- Colour temperature: 6000K°.
- Options available: 3200K°.



PHOTOMETRIC DATA


ULTRALIGHT LED 36W - MODEL 53-09 LED

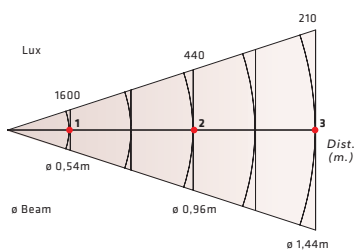

DIMENSIONS


ULTRALIGHT LED 36W
MODEL 53-09 LED

- L** 221mm (8.7")
- W** 233mm (9.17")
- H** 238mm (9.37")

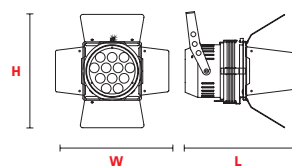

PHOTOMETRIC DATA


ULTRALIGHT LED 60W - MODEL 53-12 LED

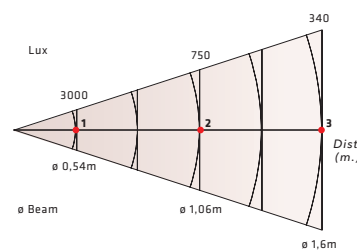

DIMENSIONS

ULTRALIGHT LED 60W
MODEL 53-12 LED

- L** 296mm (11.65")
- W** 406mm (15.98")
- H** 411mm (16.18")

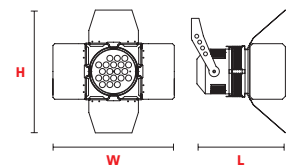

SUPPLIED WITH

- Barndoor 4-leaf.
- Buckets mounted tripod.

ACCESSORIES ULTRALIGHT LED



Barndoor
4-leaf



Dichroic colour filter:
CTO (5600K° to 3200K°)

These equipments comply with all applicable European directives and safety standards

