

PRODUCT DESCRIPTION

FRESNEL OLYMPUS 1000W


MODEL 50-03

LENS 150 MM / BASE G22

LOCATION AND STUDIO FRESNELS OFFER STYLE, DURABILITY, PERFORMANCE AND EFFICIENCY. IDEAL GENERAL PURPOSE KEYLIGHT AND BACKLIGHT FOR TELEVISION STUDIOS AND MOTION PICTURE.

- Pole operation versions available for tilt, pan and focus adjustment.
- Front and back focusing. Worm drive mechanism for focusing.
- Thermal shock resistant borosilicate fresnel lenses.
- New easy running barndoor ears.
- Superior optical performance with specially designed reflectors.
- Tubular steel yokes.
- Safety screen.
- Easy to service and maintain.


ACCESSORIES FRESNEL OLYMPUS



40-11 40-42 31-01 45-42 00-54




Manual Operated version

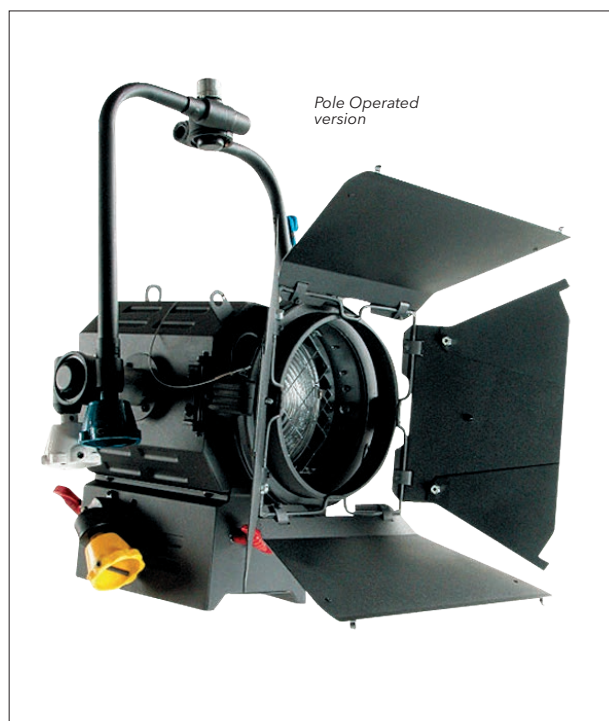

Pole Operated version

PHOTOMETRIC DATA


OLYMPUS With lamp CP40/FKJ 1000W 220V

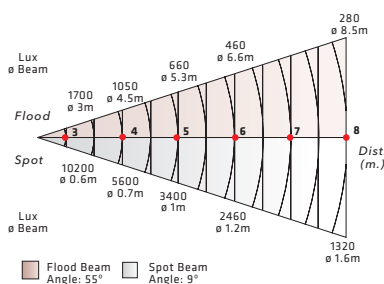

DIMENSIONS

FRESNEL OLYMPUS 1000W 50-03

- L** 323mm (12.72")
- W** 293mm (11.54")
- H** 448mm (17.65")
- 8kg (17.64 Lbs)
- 500x350x350mm (19.69"x13.78"x13.78")



LAMPS

ANSI COD.	LIF COD.	BRAND CODE	WATTS	V	SOCKET	LIFE HS	K°
FKJ	CP40	CP29 OSRAM	1000	220	G22	200	3200
FKJ	CP40	CP40	1000	220	G22	200	3200
EGT	CP40	EGT GE	1000	120	G22	250	3200
FKH	CP39	CP39	650	220	G22	150	3200
EGN	CP39	EGN GE	500	120	G22	150	3200

SUPPLIED WITH

- 150 mm Fresnel lens.
- 8 leaf rotating barndoor.
- Colour frame.
- G22 lampholder.
- Safety grid.
- In-line switch (additional).
- 2 m Power supply cable.

These equipments comply with all applicable European directives and safety standards **P25**