

# FILL LIGHTING

VARIABLE BEAM FLOODLIGHT. FOR USE IN LOCATION, SMALL VIDEO STUDIOS, ENG WORK AND STILL PHOTOGRAPHY. LIGHTWEIGHT AND POWERFUL OPEN-FACED FOCUSING FLOODLIGHT FOR USING EITHER 800W OR 1000W LAMPS. INTEGRAL SAFETY MESH AND BARNDOORS, WITH COLOUR FILTER CLIPS, STIRRUP WITH 16MM FEMALE SOCKET POWER CABLE WITH IN-LINE SWITCH.


## PRODUCT DESCRIPTION

### ULTRALIGHT 1000w

MODEL 53-11 BASE R7-s

- Compact, high-power focusing floodlight.
- Light-weight metal housing.
- Available for 800w or 1000w (220v) linear quartz-halogen 3200K lamps.
- Quick focus control.


#### ACCESSORIES ULTRALIGHT 1000W



Using Daylight Dichroic Filter

#### PHOTOMETRIC DATA


ULTRALIGHT With lamp P2/35 1000w 220V

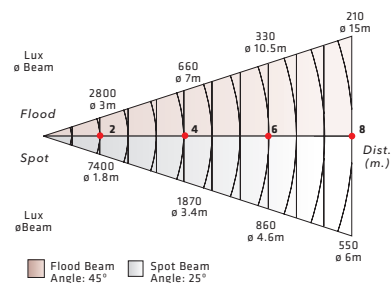

#### DIMENSIONS

ULTRALIGHT 1000W

- L 155mm (6.10")
- W 230mm (9.06")
- H 235mm (9.25")
- 2.6kg (5.73 Lbs)
- 260x260x230mm (10.24"x10.24"x9.06")



#### LAMPS

ANSI COD.	LIF COD.	BRAND CODE	WATTS	V	SOCKET	LIFE HS	K°
FBY	P2/35	P2/35 THORN	1000	220	R7-s	150	3200
DXM		DXM GE	1000	120	R7-s	150	3200
FBY		FBY GE	1000	120	R7-s	150	3200

#### SUPPLIED WITH

- Barndoor 4-leaf with colour filter clips.
- Stirrup with 16mm female socket as accessory.
- Safety mesh.
- R7-s lampholders.
- 4.5 m Power supply cable.
- In-line switch (additional).

LUMINAIRE WITH A SYMMETRICAL REFLECTOR FOR FILL LIGHTING, BACKLIGHTING, ETC. FOR USE IN TV STUDIOS, SMALL VIDEO STUDIOS, ENG WORK AND STILL PHOTOGRAPHY. INTEGRAL SAFETY MESH AND BARNDOORS, WITH COLOUR FILTER CLIPS, STIRRUP WITH 16MM FEMALE SOCKET POWER CABLE WITH IN-LINE SWITCH.

## PRODUCT DESCRIPTION

### MINI LUZ 1000w

MODEL 53-03 BASE R7-s


- Compact, and light-weight fill light.
- Symmetrical reflector, bright aluminium finish.
- Wide angle and even beam.
- Accepts 800W-1000W (220V), 500W-750W-1000W (120V) linear 118mm quartz-halogen 3200K lamps.

#### ACCESSORIES MINI LUZ 1000W



#### PHOTOMETRIC DATA

MINILUZ 1000W With lamp FDG 1000W 240V

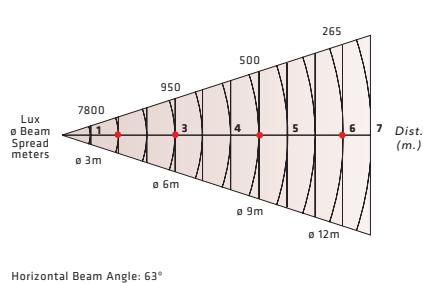


Horizontal Beam Angle: 63°

#### DIMENSIONS

MINILUZ 1000W 53-03

- L 160mm (6.3")
- W 380mm (14.97")
- H 320mm (12.6")
- 1.6kg (3.52 Lbs)
- 300x240x150mm (11.81"x9.45"x5.91")



#### LAMPS

ANSI COD.	LIF COD.	BRAND CODE	WATTS	V	SOCKET	LIFE HS	K°
FDG	P1/12	64580 OSRAM	1000	220	R7-S	150	3400
		7786R PHILIPS	1000	220	R7-S	200	3200
EME	P2/11	EME GE	800	220	R7-S	250	3200
FCM		FCM GE	1000	120	R7-S	400	3200
FDN	P2/31	FDN GE	500	120	R7-S	400	3200

#### SUPPLIED WITH

- Barndoor 4-leaf with colour filter clips.
- R7-s lampholder.
- Safety cable.
- Stirrup with 16mm female socket.
- 4.5 m Power supply cable.
- In-line switch (additional).

These equipments comply with all applicable European directives and safety standards **P29**