

FLUORESCENT CYCLORAMA STUDIO

LFS VERSION FOR CYCLORAMA LIGHTING WITH ASYMMETRICAL REFLECTOR DESIGN, TO PROVIDE EVEN COVERAGE OF CYCLORAMA AND BACKGROUNDS IN TV STUDIOS AND THEATRES. THE LFS-CYC OFFERS ALL THE BENEFITS OF FLUORESCENT LIGHTING AS LESS HEAT AND CONSUMPTION DESIGNED FOR THE CYCLORAMA LIGHTING. THE HIGH EFFICIENT ASYMMETRIC REFLECTOR DOESN'T REQUIRE INTENSIFIERS OR BARNDORS, REDUCING THE DIMENSIONS AND REQUIRED SPACE.

- LFS-4/55CYC and LFS-2/55CYC are supplied in three (3) versions: Dimming DMX, Dimming Phase Control and Non Dimming.
- LFS-4/55CYC uses 4 (four) and LFS-2/55CYC uses 2 (two) compact fluorescent lamps 55W 3200K or 5500K.
- Pole Operated and Manual models.
- Two accessory track for using colour frame and honeycombs or egg crates.
- Built-in electronic ballasts.
- Flicker free 120V or 220V 50/60Hz.
- Light-weight metal housing for studio and location uses.
- Power cable 2 mts long.

PRODUCT DESCRIPTION

LUZ FRÍA CYCLORAMA

MODEL LFS-4/55 CYC, 4 LAMPS 55W



Pole Operated version

PHOTOMETRIC DATA

LUZ FRÍA Cyc LFS-4/55CYC
With 4 Dulux L 55W 3200K Osram Lamps




| Distance (mts) | 2 | 3 | 4 | 5.6 |
|------------------------|-----|-----|-----|-----|
| Luminance (lux) | 860 | 430 | 240 | 130 |
| Beam Size Wide (mts) | 3 | 4.5 | 6 | 9 |
| Beam Size Height (mts) | 1.8 | 2.5 | 3.6 | 5.4 |

DIMENSIONS

LFS-4/55CYC

- L** 168mm (6.61")
- W** 721mm (28.39")
- H** 550mm (21.65")
- ⚖** 16.2kg (35.69 Lbs)
- 📏** 250x800x570mm (9.84"x31.5"x22.44")

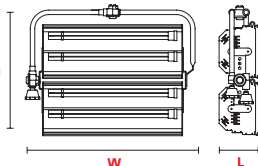

PHOTOMETRIC DATA

LUZ FRÍA Cyc LFS-2/55CYC
With 2 Dulux L 55W 3200K Osram Lamps




| Distance (mts) | 2 | 3 | 4 |
|------------------------|-----|-----|-----|
| Luminance (lux) | 450 | 250 | 130 |
| Beam Size Wide (mts) | 3 | 4.5 | 6 |
| Beam Size Height (mts) | 1.8 | 2.5 | 3.6 |

DIMENSIONS

LFS-2/55CYC

- L** 168mm (6.61")
- W** 721mm (28.39")
- H** 308mm (12.13")
- ⚖** 8.5kg (18.73 Lbs)
- 📏** 250x800x450mm (9.84"x31.5"x17.72")

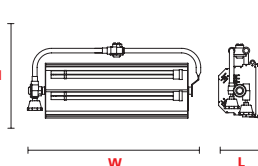


PRODUCT DESCRIPTION

LUZ FRÍA CYCLORAMA

MODEL LFS-2/55 CYC, 2 LAMPS 55W



Pole Operated version

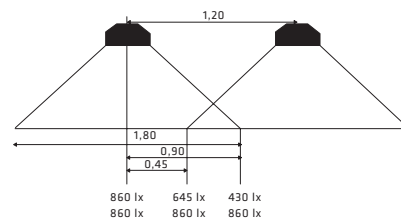

LAMPS

| CODE | DESCRIPTION | WATTS | LIFE HS | K° | APPLICATION |
|----------------|------------------|-------|---------|------|-------------|
| Dulux L 55/930 | Osram Dulux D | 55 | 1000 | 3200 | Indoor |
| Dulux L 55/954 | Osram Dulux D | 55 | 1000 | 5600 | Daylight |
| Studioline 32 | Osram Studioline | 55 | 1000 | 3200 | Indoor |

ASIMMETRIC REFLECTOR

