

FRESNELS LED

PRODUCT DESCRIPTION

FRESNEL LED LOCATION SERIES 50W MODEL 53-18/T

- Ideal for location uses.
- High efficient led 50W CRI ≥ 92.
- Full manual dimming.
- Colour temperature: 5600K° or 3200K°.
- Power requirements: 110V-240V.
- Power consumption only 40W.
- Fresnel lens Ø 80mm.

ACCESSORIES FRESNEL LED LOCATION SERIES 50W



Barndoor
4-leaf
40-02




Colour conversion &
Diffusion filter frame
40-40



PHOTOMETRIC DATA

FRESNEL LED LOCATION SERIES 50W - MODEL 53-18/T

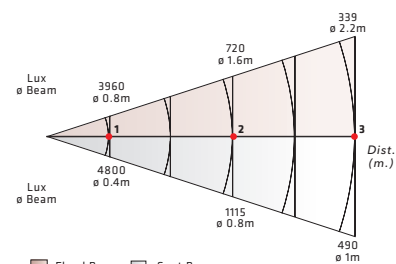


Ap 451mm
x: 0.3344 y: 0.3470

DIMENSIONS

FRESNEL LED LOCATION SERIES 50W
MODEL 53-18/T

- L 175mm (6.88")
- W 180mm (7.08")
- H 318mm (12.51")



SUPPLIED WITH

- Barndoor 4-leaf.
- Filter frame.
- Safety grid.
- 2 m power supply cable.

PRODUCT DESCRIPTION

FRESNEL LED LOCATION SERIES 90W MODEL 53-19/T

- Ideal for location uses.
- High efficient led 90W CRI ≥ 92.
- Full manual dimming.
- Colour temperature: 5600K° or 3200K°.
- Power requirements: 110V-240V.
- Power consumption only 80W.
- Fresnel lens Ø 120mm.

ACCESSORIES FRESNEL LED LOCATION SERIES 90W



Barndoor
4-leaf
40-03




Colour conversion &
Diffusion filter frame
40-41



PHOTOMETRIC DATA

FRESNEL LED LOCATION SERIES 90W - MODEL 53-19/T

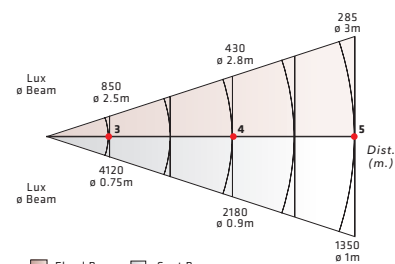


Ap 449mm
x: 0.3335 y: 0.3489

DIMENSIONS

FRESNEL LED LOCATION SERIES 90W
MODEL 53-19/T

- L 281mm (11.06")
- W 211mm (8.3")
- H 400mm (15.74")



SUPPLIED WITH

- Barndoor 4-leaf.
- Filter frame.
- Safety grid.
- 2 m power supply cable.