

# FRESNELS LED



53-19/T

## FRESNEL LED LOCATION 100W

- Ideal for location uses
- High efficient led 100w CRI ≥ 95
- Full manual dimming control
- Colour temperature: 5600K<sup>a</sup> or 3200K<sup>o</sup>
- Power requirements: 90V-240V
- Power consumption only 100w
- Fresnel lens Ø 120mm

### ACCESSORIES




Barndoor 4-leaf



Colour conversion & Diffusion filter frame

### DIMENSIONS

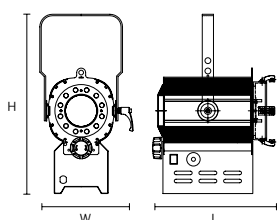


L 300mm (11,81")  
 W 200mm (7,87")  
 H 400mm (15,75")  
 4,700 kg

### PHOTOMETRIC DATA

#### Spot

| Distance     | 3 mts    | 4 mts    | 5 mts    |
|--------------|----------|----------|----------|
| Center beam  | 4120 lux | 2180 lux | 1350 lux |
| Light beam Ø | 0,75 mts | 0,90 mts | 1,40 mts |
| CCT K°       | 5800     | 5800     | 5800     |
| CRI          | 95       | 95       | 95       |

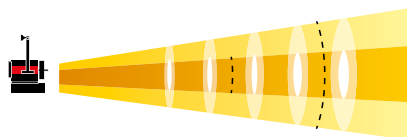

#### Flood

| Distance     | 3 mts    | 4 mts    | 5 mts    |
|--------------|----------|----------|----------|
| Center beam  | 1710 lux | 1080 lux | 780 lux  |
| Light beam Ø | 2,50 mts | 2,80 mts | 3,30 mts |
| CCT K°       | 5800     | 5800     | 5800     |
| CRI          | 95       | 95       | 95       |

### KIT CONTENTS

Lamphead  
 Barndoor 4-leaf  
 Filter frame  
 Safety grid  
 2 m power supply cable