

FRESNELS LED



53-18/T

FRESNEL LED LOCATION 60W

- Ideal for location uses
- High efficient led 60w CRI ≥ 95
- Full manual dimming control
- Colour temperature: 5600K^a or 3200K^o
- Power requirements: 90V-240V
- Power consumption only 60w
- Fresnel lens Ø 80mm

ACCESSORIES




Barndoor 4-leaf



Colour conversion & Diffusion filter frame


DIMENSIONS



L 175mm (6.88")
 W 180mm (7.08")
 H 318mm (12.51")
 3,200 kg

PHOTOMETRIC DATA

Spot			
Distance	1 mts	2 mts	3 mts
Center beam	4800 lux	1115 lux	490 lux
Light beam Ø	0,40 mts	0,80 mts	1,10 mts
CCT K°	5800	5800	5800
CRI	95	95	95

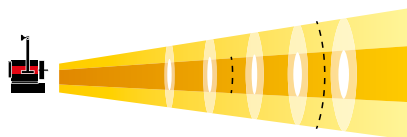

Flood			
Distance	1 mts	2 mts	3 mts
Center beam	3960 lux	720 lux	340 lux
Light beam Ø	0,80 mts	1,60 mts	2,20 mts
CCT K°	5800	5800	5800
CRI	95	95	95

KIT CONTENTS

Lamphead
 Barndoor 4-leaf
 Filter frame
 Safety grid
 2 m power supply cable