

LED PANELS



53-57/M

PRIMA FLEX V1 80W SOFT LED PANEL CONTROL MANUAL


- Single Color 3200K° or 5600K°, Bi-Colour 3200K° to 5600K°
- No Fan. Efficient cooling
- Full Flicker Free
- CRI→95
- DMX / Manual control
- Dimming 0-100%
- Pole operation version available
- Lightweight aluminum construction
- 100-230Volts 50/60H

ACCESSORIES

45-42


00-54

DIMENSIONS



L 90mm (3.54")
W 360mm (14.17")
H 320mm (12.59")
KG 3,300 kg

PHOTOMETRIC DATA

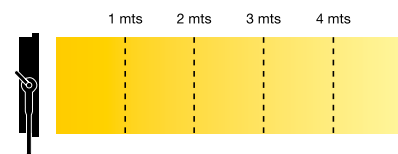

53-57 Colour temperature 3200K°

Distance	1 mts	2 mts	3 mts	4 mts
Center beam	2150 lux	600 lux	295 lux	180 lux
CCT K°	3200	3200	3200	3200
CRI	95	95	95	95

53-57 Colour temperature 5600K°

Distance	1 mts	2 mts	3 mts	4 mts
Center beam	2518 lux	705 lux	345 lux	205 lux
CCT K°	5600	5600	5600	5600
CRI	95	95	95	95

KIT CONTENTS

Lamphead
Barndoor 4 leaf
Diffusion filter
2 m power cable
Buil-in power supply