

LED PANELS



Pole Operation

53-58

PRIXMA FLEX V2 150W SOFT LED PANEL

Available versions:


- Single Color 3200K° or 5600K°
- Bi-Colour 3200K° to 5600K°
- No Fan. Efficient cooling
- Full Flicker Free
- CRI>95
- DMX / Manual control
- Dimming 0-100%
- Pole operation version available
- Lightweight aluminum construction
- 100-230Volts 50/60H

ACCESSORIES

45-42


8 00-54

DIMENSIONS

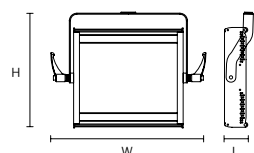

L 90mm (3.54")
 W 605mm (23.81")
 H 320mm (12.59")
 6,500 kg

PHOTOMETRIC DATA

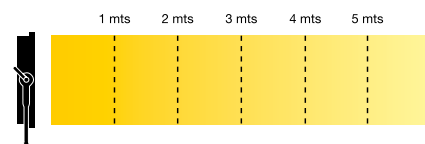

53-58 Colour temperature 3200K°

Distance	1 mts	2 mts	3 mts	4 mts	5 mts
Center beam	6330 lux	1570 lux	698 lux	415 lux	285 lux
CCT K°	3200	3200	3200	3200	3200
CRI	95	95	95	95	95

53-58 Colour temperature 5600K°

Distance	1 mts	2 mts	3 mts	4 mts	5 mts
Center beam	6875 lux	1680 lux	760 lux	448 lux	305 lux
CCT K°	5600	5600	5600	5600	5600
CRI	95	95	95	95	95

KIT CONTENTS

- Lamphead
- Diffusion filter
- Barndoor 4 leaf
- 2 m power cable
- Built-in power supply