

LED PANELS

NEW!!



53-58

PRIMA FLEX V2 165W SOFT LED PANEL

Available versions:


- Single Color 3200K° or 5600K°
- Bi-Colour 3200K° to 5600K°
- No Fan. Efficient cooling
- Full Flicker Free / CRI97
- Barndoor 4 lead and/or Egg Crate accessories
- DMX / Manual control
- Dimming 0-100%
- Pole operation version available
- Lightweight aluminum construction
- 100-230Volts 50/60H

ACCESSORIES

45-42


00-54

DIMENSIONS



L 114mm (4.48")
W 700mm (27.55")
H 474mm (18.66")
8,900 kg

PHOTOMETRIC DATA

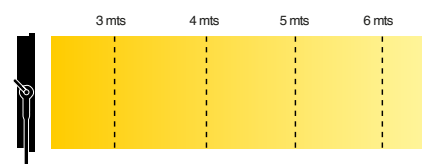

FLOOD

Distance	3 mts	4 mts	5 mts	6 mts
Center Beam	830 lux	525 lux	360 lux	290 lux
CCT K°	6500	6500	6500	6500
CRI	97	97	97	97

Center Beam	710 lux	450 lux	320 lux	245 lux
CCT K°	2700	2700	2700	2700
CRI	97	97	97	97

KIT CONTENTS

Lamphead
Diffusion filter
Barndoor 4 leaf
2 m power cable
Buil-in power supply