

FRESNELS LED



SPL-200/MO SPL-200/PO

FRESNEL LED STUDIO 200W

- High efficient led 200w high CRI ≥ 95
- Power consumption: 200w
- Colour temperature: 5600K° or 3200K°
- Dimming 0 to 100%
- Flicker free
- Power requirements: 90V-240V 50/60Hz
- Control method: DMX or local (manual) dimming
- Powercom for power daisy chain
- Fresnel lens \varnothing 150mm
- MO manual operation version - PO pole operation version

ACCESSORIES




Barndoor 8-leaf



Colour conversion & Diffusion filter frame

DIMENSIONS




L 380mm (14.96")
 W 306mm (12.04")
 H 542mm (21.33")
 9,500 kg

PHOTOMETRIC DATA

Spot

Distance	4 mts	5 mts	6 mts	7 mts	8 mts
Center beam	6150 lux	4030 lux	2740 lux	2100 lux	1612 lux
Light beam \varnothing	1,30 mts	1,70 mts	1,90 mts	2,10 mts	2,30 mts
CCT K°	5900	5900	5900	5900	5900
CRI	95	95	95	95	95

Center beam	7698 lux	4684 lux	3284 lux	2400 lux	1880 lux
Light beam \varnothing	1,30 mts	1,70 mts	1,90 mts	2,10 mts	2,30 mts
CCT K°	3190	3190	3190	3190	3190
CRI	96	96	96	96	96

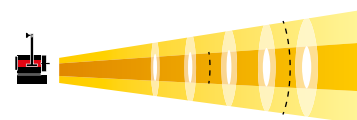

Flood

Distance	4 mts	5 mts	6 mts	7 mts	8 mts
Center beam	2425 lux	1550 lux	1064 lux	854 lux	675 lux
Light beam \varnothing	3,00 mts	3,30 mts	3,80 mts	4,50 mts	5,00 mts
CCT K°	6150	6150	6150	6150	6150
CRI	95	95	95	95	95

Center beam	3065 lux	1879 lux	1315 lux	995 lux	760 lux
Light beam \varnothing	3,00 mts	3,30 mts	3,80 mts	4,50 mts	5,00 mts
CCT K°	3250	3250	3250	3250	3250
CRI	96	96	96	96	96

KIT CONTENTS

- Lamphead
- Barndoor 8-leaf
- Filter frame
- Safety grid
- 2 m power supply cable