

FRESNELS LED



SPL-300/MO SPL-300/PO


FRESNEL LED STUDIO 300W

- High efficient led 300w high CRI ≥ 95
- Power consumption: 300w
- Colour temperature 5600K° or 3200K°
- Dimming 0 to 100%
- Flicker free
- Power requirements 90V-240V 50/60Hz
- Control method: DMX or local (manual) dimming
- Powercom for power daisy chain
- Fresnel lens Ø 175mm
- MO manual operation version - PO pole operation version

ACCESSORIES

- Barn door 8-leaf
- Colour conversion & Diffusion filter frame

DIMENSIONS




L 396mm (15.59")
 W 399mm (15.70")
 H 542mm (21.33")
 12,500 kg

PHOTOMETRIC DATA

Spot

Distance	4 mts	5 mts	6 mts	7 mts	8 mts
Center beam	4980 lux	2950 lux	2065 lux	1455 lux	1120 lux
Light beam Ø	1,60 mts	2,00 mts	2,30 mts	2,70 mts	2,90 mts
CCT K°	5500	5500	5500	5500	5500
CRI	95	95	95	95	95

Center beam	4330 lux	2550 lux	1765 lux	1265 lux	970 lux
Light beam Ø	1,60 mts	2,00 mts	2,30 mts	2,70 mts	2,90 mts
CCT K°	3050	3050	3050	3050	3050
CRI	96	96	96	96	96

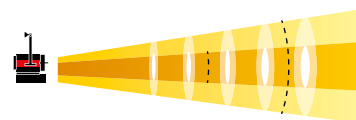

Flood

Distance	4 mts	5 mts	6 mts	7 mts	8 mts
Center beam	3578 lux	2189 lux	1495 lux	1100 lux	871 lux
Light beam Ø	3,40 mts	3,70 mts	4,30 mts	5,50 mts	7,20 mts
CCT K°	5500	5500	5500	5500	5500
CRI	95	95	95	95	95

Center beam	2011 lux	1230 lux	840 lux	632 lux	495 lux
Light beam Ø	3,40 mts	3,70 mts	4,30 mts	5,50 mts	7,20 mts
CCT K°	3100	3100	3100	3100	3100
CRI	96	96	96	96	96

KIT CONTENTS

- Lamphead
- Barn door 8-leaf
- Filter frame
- Safety grid
- 2 m power supply cable