



STUDIO FRESNEL LED 600W VARIABLE WHITE 2700K° to 6500K°

FRESNELS LED

Fresnels LED 600W BI-COLOR built with aluminum profiles and steel, on modern and compact design, ensuring maximum dissipation and lightweight. Leds with adjustable color temperature from 2700K° to 6500K°, offering high colour rendering (CRI average >95),

Efficient optical system uses high quality reflector and fresnel lens glass to ensure maximum lighting performance. Saves up to 85% in energy consumption compared to halogen fresnels and a considerable reduction of heat emission.

The FRESNEL LED can be controlled via DMX from the console or manually by a potentiometer located on the control panel of the same fresnel Led. The control panel has an LCD and buttons to set the display DMX address, also select the type of DMX-Manual control, allowing display the percentage of light output and the LED voltage, as well as the temperature inside the equipment and its system electronic, and other parameters.

They are equipped with high quality drivers.

Flicker free, and noiseless turbine, to ensure maximum extension of the lifetime of the LED.

Available models Manual and Pole Operated.


MODELS

SPL-600/BI/MO Manual Operation SPL-600/BI/PO Pole Operation Variable White Color

- High efficient led 600W. Hi CRI? 95
- Power consumption: 600W.
- Power requirements: 90V-240V 50/60Hz.
- Control method: DMX or Local (manual) dimming.
- Colour temperature: Adjustable 2700K° to 6500K°
- Flicker Free.
- Fresnel lens Ø 250mm.
- Powercom for power daisy chain.
- Warranty 2 years

FRESNEL SPL-600/XL/BI/MO SPL-600/XL/BI/PO

SPOT							
Distancia	4 mts	5 mts	6 mts	7 mts	8 mts	9 mts	
Center beam	14770 lux	9845 lux	7049 lux	5127 lux	3969 lux	3202 lux	
Light beam diameter	3,00 mts	3,30 mts	3,50 mts	4,00 mts	4,60 mts	5,10 mts	
CCT	6600	6600	6600	6600	6600	6600	
CRI	96	96	96	96	96	96	
Center beam	9585 lux	6405 lux	4505 lux	3558 lux	2556 lux	2067 lux	
CCT	2800	2800	2800	2800	2800	2800	
CRI	97	97	97	97	97	97	

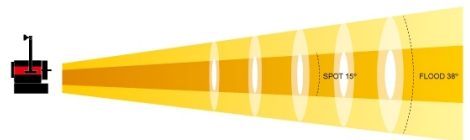

FLOOD							
Distancia	4 mts	5 mts	6 mts	7 mts	8 mts	9 mts	
Center beam	1640 lux	1010 lux	725 lux	538 lux	429 lux	355 lux	
Light beam diameter	6,00 mts	7,00 mts	8,00 mts	9,00 mts	10,00 mts	11,00 mts	
CCT	6510	6510	6510	6510	6510	6510	
CRI	95	95	95	95	95	95	
Center beam	1069 lux	685 lux	488 lux	360 lux	285 lux	235 lux	
CCT	2780	2780	2780	2780	2780	2780	
CRI	97	97	97	97	97	97	

**SUPPLIED WITH:**

- Barndoor 8-leaf.
- Filter frame.
- Safety grid.
- 2 m power supply cable