



## FRESNEL LED 500W RGBA+WW

### FRESNELS LED

Fresnels LED 500W RGBAWW built with aluminum profiles and steel, on modern and compact design, ensuring maximum dissipation and lightweight. Leds with adjustable color temperature from 2700K° to 6500K°, offering high colour rendering (CRI average >95),

Efficient optical system uses high quality reflector and fresnel lens glass to ensure maximum lighting performance. Saves up to 85% in energy consumption compared to halogen fresnels and a considerable reduction of heat emission.

The FRESNEL LED can be controlled via DMX from the console or manually by a potentiometer located on the control panel of the same fresnel Led. The control panel has an LCD and buttons to set the display DMX address, also select the type of DMX-Manual control, allowing display the percentage of light output and the LED voltage, as well as the temperature inside the equipment and its system electronic, and other parameters.

They are equipped with high quality drivers.


Flicker free, and noiseless turbine, to ensure maximum extension of the lifetime of the LED.

Available models Manual and Pole Operated.

## MODELS


**SPL-500/RGBA+WW** Manual Operation  
**SPL-500/RGBA+WW/PO** Pole Operation

- High efficient led RGBAWW 500W. White leds high CRI ? 95
- Red, Green, Blue, Amber, White 2700K° and White 6500K°
- Power requirements: 90V-240V 50/60Hz.
- Control method: DMX or Local (manual) dimming.
- Colour temperature for white leds:: Adjustable 2700K° to 6500K°
- Flicker Free.
- Fresnel lens Ø 200mm.
- Power requirements: 90V-240V 50/60Hz.
- Powercom for power daisy chain.
- Warranty 2 years

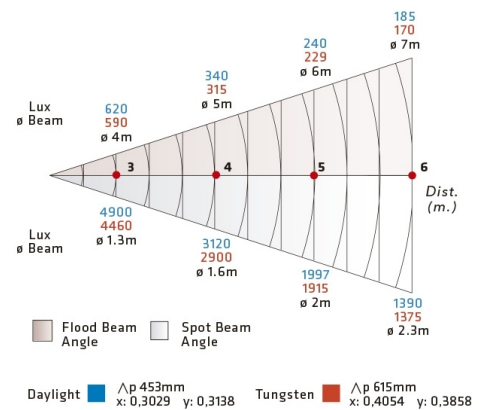



**L** 350mm (13.77")  
**W** 447mm (17.59")  
**H** 611mm (24.05")

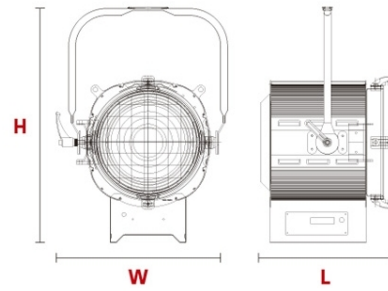

**SUPPLIED WITH:**

- Barndoor 8-leaf.
- Filter frame.
- Safety grid.
- 2 m power supply cable.

