



FRESNEL LED LOCATION 60W DIMMING MANUAL

FRESNELS LED

FRESNEL LED 60W built on aluminum profiles and steel on a modern and compact design, ensuring maximum dissipation. Efficient optical system uses high quality reflector and fresnel lens glass to ensure maximum emission of a highly powerful LED chip. Saves up to 85% in energy consumption compared to halogen fresnels and a considerable reduction of heat emission.

The Fresnel 53-18/T can be controlled manually by a potentiometer located the same fresnel Led body.


They are equipped with high quality drivers.

Flicker free, and noiseless turbine, to ensure maximum extension of the lifetime of the LED.

DATOS FOTOMÉTRICOS

FRESNEL 53-18

SPOT			
Distancia	1 mts	2 mts	3 mts
Center beam	4900 lux	1115 lux	490 lux
Light beam diameter	0,40 mts	0,80 mts	1,10 mts
CCT	5800	5800	5800
CRI	92	92	92

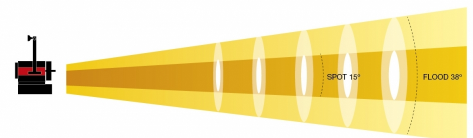

FLOOD			
Distancia	1 mts	2 mts	3 mts
Center beam	3960 lux	720 lux	340 lux
Light beam diameter	0,30 mts	1,60 mts	2,20 mts
CCT	5800	5800	5800
CRI	92	92	92

MODELOS


53-18/T

- Ideal for location uses.
- High efficient led 60W CRI ? 92.
- Full manual dimming.
- Colour temperature: 5600Kº or 3200Kº.
- Power requirements: 110V-240V.
- Power consumption only 60W.
- Fresnel lens Ø 80mm



DIMENSIONES

- L** 175mm (6.88")
- W** 180mm (7.08")
- H** 318mm (12.51")



FORNECIDO COM:

- Barn door 4-leaf.
- Filter frame.
- Safety grid.
- 2 m power supply cable.