



PRIMA FLEX V2 Series 150W


SOFT LED PANEL

PRIMA Flex V2 are Led Panels of 150W with high light output performance and very lightweight, are ideal for applications on small and medium TV studios as well as locations (outdoors). Built in compact aluminum design, easily transportable and versatile. They are available in Bi-Color versions (variable temperature from 3200K ° to 5700K °), and Single Color 3200K ° or 5700K °. Models for manual control or via DMX. They use LEDs with high CRI and TLCI, with high quality and reliable electronics. With built-in diffuser filter, it offers soft and even lighting.

Accepts AC 100V-240V power. Does not use external power supplies.

DATOS FOTOMÉTRICOS

PRIMA V2 53-58 Single color tungsten 3200K°

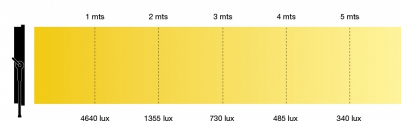

| Distancia | 1 mts | 2 mts | 3 mts | 4 mts | 5 mts |
|-------------|----------|----------|---------|---------|---------|
| Center beam | 4640 lux | 1355 lux | 730 lux | 485 lux | 340 lux |
| CCT | 3200 | 3200 | 3200 | 3200 | 3200 |
| CRI | 95 | 95 | 95 | 95 | 95 |

MODELOS

53-58

- It is available in Single Color versions: Daylight 5600K° or Tungsten 3200K°, or Bi-Color 3200K ° - 5600K °.

- Offering models for Manual Control or via DMX.

Model 53-58 / M Single color, Manual Control

Model 53-58 / D Single color, DMX Control

Model 53-58 / BM Bi-Color, Manual Control

Model 53-58 / BD Bi-Color, DMX Control


- High CRI and TLCI ? 95

- No fans used.

- AC auto 110-230VAC

DATOS FOTOMÉTRICOS


PRIXMA V2 53-58 Single color daylight 5600K°

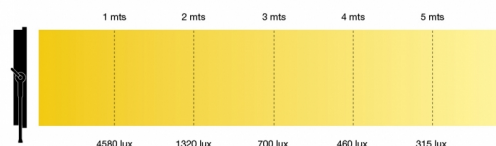

| Distancia | 1 mts | 2 mts | 3 mts | 4 mts | 5 mts |
|-------------|----------|----------|---------|---------|---------|
| Center beam | 4580 lux | 1320 lux | 700 lux | 460 lux | 315 lux |
| CCT | 5600 | 5600 | 5600 | 5600 | 5600 |
| CRI | 95 | 95 | 95 | 95 | 95 |

DATOS FOTOMÉTRICOS


PRIXMA V2 53-58/B Variable color 3200K° - 5600K°

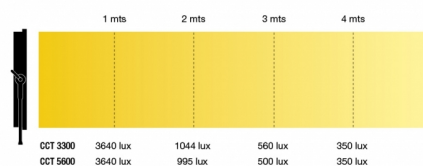

| Distancia | 1 mts | 2 mts | 3 mts | 4 mts |
|-------------|----------|----------|---------|---------|
| Center beam | 3640 lux | 1044 lux | 560 lux | 350 lux |
| CCT | 3300 | 3300 | 3300 | 3300 |
| CRI | 95 | 95 | 95 | 95 |
| Center beam | 3640 lux | 995 lux | 500 lux | 350 lux |
| CCT | 5600 | 5600 | 5600 | 5600 |
| CRI | 95 | 95 | 95 | 95 |

DIMENSIONES

L 90 mm
W 360 mm
H 320 mm

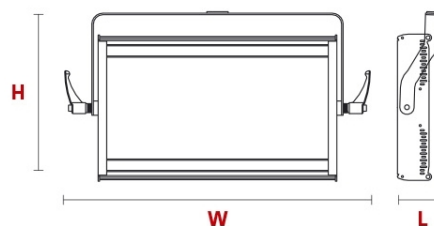

FORNECIDO COM:

- Diffusion filter
- Power Cable 2 mts
- Built-in power supply