


PRIXMA PRO II STUDIO 220W

STUDIO SOFT LED PANEL 220W

PRIXMA PRO are 200W professional Led lighting panels, offering lightweight and compact construction with style and design. Available versions with adjustable color temperature 3200K° to 5600K° (Bi-Color), and Single color 3200K° or 5600K°. Perfect application for TV Studios, Film and Photo. PRIMXA PRO II are new generation of lighting fixtures, developed with the latest technology for producing high performance in lighting and energy efficiency, with high CRI and TLCI rating. Operates cool without any fan. The consumption for Prixma Pro I is only 200W. Prixma Pro provides soft and even lighting for the whole range, deleting shadows, with high lighting quality. It works at 100-240V as well as with V-battery 14,8V

DATOS FOTOMÉTRICOS

PRIXMA PRO II 53-38 Single color tungsten 3200K°

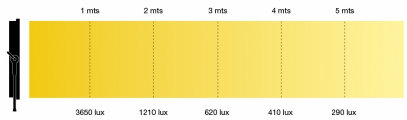

Distancia	1 mts	2 mts	3 mts	4 mts	5 mts
Center beam	3650 lux	1210 lux	620 lux	410 lux	290 lux
CCT	3300	3300	3300	3300	3300
CRI	94	94	94	94	94

MODELOS

53-38 PRO II LED PANEL

- High Power 200W Soft lighting.
- CRI & TLCI ? 93.
- Adjustable Color temperature 3200K° to 5600K°.
- Available models single color 5600K° or 3200K°
- Full Flicker Free.
- Cooling without fan, no noise.
- Only 200W consumption
- Power 100V-240V or by battery 14,8V
- Control method DMX or Local (manual) dimming.
- Lightweight contruction and attractive design
- Pole Operated availableV


FICHA TÉCNICA

www.dexel.com



DATOS FOTOMÉTRICOS


PRIXMA PRO II 53-38 Single color daylight 5600K°

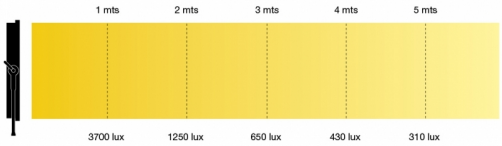

Distancia	1 mts	2 mts	3 mts	4 mts	5 mts
Center beam	3700 lux	1250 lux	650 lux	430 lux	310 lux
CCT	5600	5600	5600	5600	5600
CRI	94	94	94	94	94

DATOS FOTOMÉTRICOS

PRIXMA PRO II 53-38 Variable color 3200K° - 5600K°

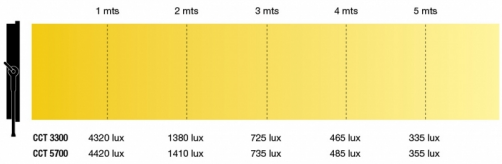


Distancia	1 mts	2 mts	3 mts	4 mts	5 mts
Center beam	4320 lux	1380 lux	725 lux	465 lux	335 lux
CCT	3300	3300	3300	3300	3300
CRI	94	94	94	94	94
Center beam	4420 lux	1410 lux	735 lux	485 lux	355 lux
CCT	5700	5700	5700	5700	5700
CRI	94	94	94	94	94

DIMENSIONES

L 144mm (5.66")

W 868mm (34.17")

H 354mm (13.93")

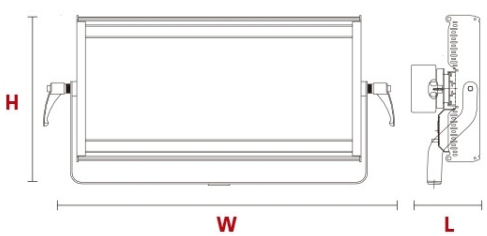

FORNECIDO COM:

Power Supply