

FRESNEL LED LOCATION 100W DIMMING MANUAL

FRESNELS LED

FRESNEL LED 100W built on aluminum profiles and steel on a modern and compact design, ensuring maximum dissipation. Efficient optical system uses high quality reflector and fresnel lens glass to ensure maximum emission of a highly powerful LED chip. Saves up to 85% in energy consumption compared to halogen fresnels and a considerable reduction of heat emission.

The Fresnel 53-19/T can be controlled manually by a potentiometer located the same fresnel Led body.


They are equipped with high quality drivers.

Flicker free, and noiseless turbine, to ensure maximum extension of the lifetime of the LED.

DATOS FOTOMÉTRICOS

FRESNEL 90W 53-19

SPOT			
	3 mts	4 mts	5 mts
Distancia	3 mts	4 mts	5 mts
Center beam	4120 lux	2190 lux	1350 lux
Light beam diameter	0,75 mts	0,90 mts	1,40 mts
CCT	5800	5800	5800
CRI	92	92	92

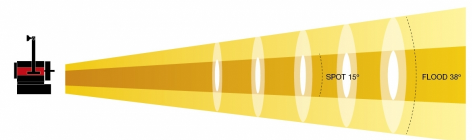

FLOOD			
	3 mts	4 mts	5 mts
Distancia	3 mts	4 mts	5 mts
Center beam	1710 lux	1080 lux	780 lux
Light beam diameter	2,50 mts	2,80 mts	3,30 mts
CCT	5800	5800	5800
CRI	92	92	92

MODELOS

53-19/T


- Ideal for location uses.
- High efficient led 100W CRI ? 92.
- Full manual dimming.
- Colour temperature: 5600K° or 3200K°.
- Power requirements: 110V-240V.
- Power consumption only 100W.
- Fresnel lens Ø 120mm.





DIMENSIONES

- L** 281mm (11.06")
- W** 211mm (8.3")
- H** 400mm (15.74")

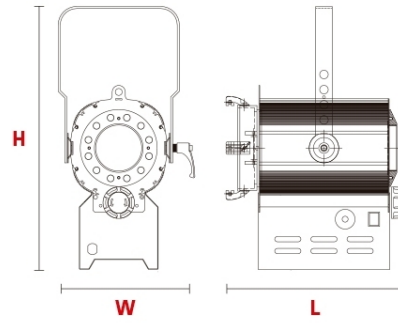

FORNECIDO COM:

- Barndoor 4-leaf.
- Filter frame.
- Safety grid.
- 2 m power supply cable.