



## STUDIO FRESNEL LED COMPACT 65W DMX 3200K° o 5600K°

### FRESNELS LED

Fresnels LED 65W built with aluminum profiles and steel, on modern and compact design, ensuring maximum dissipation and lightweight. Leds available for 3200K° or 5600K°, offering high colour rendering (CRI average >95),

Efficient optical system uses high quality reflector and fresnel lens glass to ensure maximum lighting performance. Saves up to 85% in energy consumption compared to halogen fresnels and a considerable reduction of heat emission.

The FRESNEL LED can be controlled via DMX from the console or manually by a potentiometer located on the control panel of the same fresnel Led. The control panel has an LCD and buttons to set the display DMX address, also select the type of DMX-Manual control, allowing display the percentage of light output and the LED voltage, as well as the temperature inside the equipment and its system electronic, and other parameters.

They are equipped with high quality drivers.

Flicker free, and noiseless turbine, to ensure maximum extension of the lifetime of the LED.

Available models Manual and Pole Operated


## MODELOS

### 53-21

- High efficient led 65W.
- Power consumption: 65W.
- Power requirements: 110V-240V 50/60Hz.
- Control method: DMX or Local (manual) dimming.
- Colour temperature: 5600K° or 3200K°.
- Flicker Free.
- Fresnel lens Ø 120mm.
- Powercom for power daisy chain.
- Warranty 2 years

### FRESNEL 53-21 60W 5700K°

SPOT						
Distancia	2 mts	3 mts	4 mts	5 mts	6 mts	
Center beam	12500 lux	5530 lux	3160 lux	1950 lux	1355 lux	
Light beam diameter	0,50 mts	0,85 mts	1,10 mts	1,40 mts	1,80 mts	
CCT	5600	5306	5370	5345	5334	
CRI	92	92	92	92	92	
Center beam	14169 lux	6180 lux	3395 lux	2154 lux	1455 lux	
Light beam diameter	0,50 mts	0,85 mts	1,10 mts	1,40 mts	1,80 mts	
CCT	3130	3130	3130	3130	3130	
CRI	91,5	91,5	91,5	91,5	91,5	

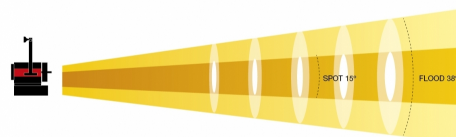


FLOOD						
Distancia	2 mts	3 mts	4 mts	5 mts	6 mts	
Center beam	4900 lux	2136 lux	1234 lux	765 lux	545 lux	
Light beam diameter	1,10 mts	2,00 mts	2,40 mts	3,20 mts	3,40 mts	
CCT	5650	5652	5634	5629	5620	
CRI	92	92	92	92	92	
Center beam	5418 lux	2451 lux	1340 lux	870 lux	612 lux	
Light beam diameter	1,10 mts	2,00 mts	2,40 mts	3,20	3,40	
CCT	3175	3175	3175	3175	3175	
CRI	91,5	91,5	91,5	91,5	91,5	

**L** 250mm (9.84")

**W** 200mm (7.87")

**H** 357mm (14.05")

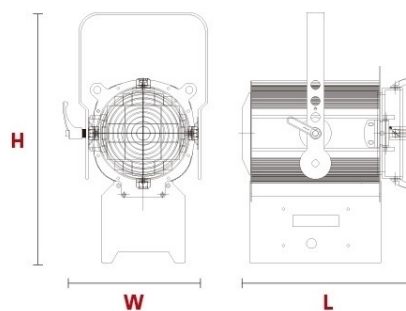

#### FORNECIDO COM:

- Barndoor 4-leaf.
- Colour frame.
- Safety grid.
- 2 m power supply cable.