



STUDIO FRESNEL LED 1000W VARIABLE WHITE 2700K° to 6500K°

FRESNELS LED

Fresnels LED 1000W BI-COLOR built with aluminum profiles and steel, on modern and compact design, ensuring maximum dissipation and lightweight. Leds with adjustable color temperature from 2700K° to 6500K°, offering high colour rendering (CRI average >95),

Efficient optical system uses high quality reflector and fresnel lens glass to ensure maximum lighting performance. Saves up to 85% in energy consumption compared to halogen fresnels and a considerable reduction of heat emission.

The FRESNEL LED can be controlled via DMX from the console or manually by a potentiometer located on the control panel of the same fresnel Led. The control panel has an LCD and buttons to set the display DMX address, also select the type of DMX-Manual control, allowing display the percentage of light output and the LED voltage, as well as the temperature inside the equipment and its system electronic, and other parameters.

They are equipped with high quality drivers.

Flicker free, and noiseless turbine, to ensure maximum extension of the lifetime of the LED.

Available models Manual and Pole Operated.


MODELOS

SPL-1000/BI/MO Manual Operations SPL-1000/BI/PO Pole Operation Variable White Color

- High efficient led 1000W. Hi CRI? 95
- Power consumption: 1000W.
- Power requirements: 90V-240V 50/60Hz.
- Control method: DMX or Local (manual) dimming.
- Colour temperature: Adjustable 2700K° to 6500K°
- Flicker Free.
- Fresnel lens Ø 300mm.
- Powercom for power daisy chain.
- Warranty 2 years

FRESNEL SPL-1000/BI/MO SPL-1000/BI/PO

SPOT						
Distancia	5 mts	6 mts	7 mts	8 mts	9 mts	10 mts
Center beam	12009 lux	9165 lux	6625 lux	5160 lux	4184 lux	3231 lux
Light beam diameter	4,10 mts	4,60 mts	5,10 mts	5,60 mts	6,40 mts	6,90 mts
CCT	6500	6500	6500	6500	6500	6500
CRI	96	96	96	96	96	96
Center beam	8326 lux	5856 lux	4828 lux	3338 lux	2697 lux	1835 lux
CCT	2800	2800	2800	2800	2800	2800
CRI	97	97	97	97	97	97

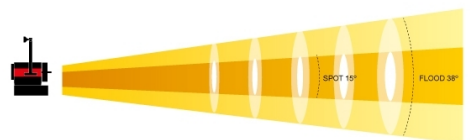

FLOOD						
Distancia	5 mts	6 mts	7 mts	8 mts	9 mts	10 mts
Center beam	1303 lux	935 lux	694 lux	554 lux	458 lux	305 lux
Light beam diameter	8,00 mts	9,00 mts	10,00 mts	11,00 mts	12,00 mts	13,00 mts
CCT	6500	6500	6500	6500	6500	6500
CRI	96	96	96	96	96	96
Center beam	885 lux	630 lux	469 lux	370 lux	305 lux	213 lux
CCT	2800	2800	2800	2800	2800	2800
CRI	97	97	97	97	97	97



FORNECIDO COM:

- Barndoor 8-leaf.
- Filter frame.
- Safety grid.
- 2 m power supply cable