



MODELOS

SPL-200/LO

- Ideal for location uses.
- High efficient COB led 200W CRI ? 92.
- Full manual dimming.
- Colour temperature: 5600K° or 3200K°.
- Power requirements: 110V-240V.
- Power consumption only 180W.
- Fresnel lens Ø 150mm.
- Full Flicker free

FRESNEL LED LOCATION 200W DIMMING MANUAL


FRESNELS LED

FRESNEL LED 200W built on aluminum profiles and steel on a modern and compact design, ensuring maximum dissipation. Efficient optical system uses high quality reflector and fresnel lens glass to ensure maximum emission of a highly powerful LED chip. Saves up to 85% in energy consumption compared to halogen fresnels and a considerable reduction of heat emission.

The Fresnel SPL-200LO can be controlled manually by a potentiometer located the same fresnel Led body. Provided with COB led single color 3200K° or 5600K°, high CRI. Flicker free, and noiseless turbine, to ensure maximum extension of the lifetime of the LED. Lens 150mm diameter

FRESNEL SPL-200

| SPOT | | | | | |
|---------------------|----------|----------|----------|----------|----------|
| Distancia | 4 mts | 5 mts | 6 mts | 7 mts | 8 mts |
| Center beam | 6150 lux | 4030 lux | 2740 lux | 2100 lux | 1612 lux |
| Light beam diameter | 1,30 mts | 1,70 mts | 1,90 mts | 2,10 mts | 2,30 mts |
| CCT | 5600 | 5600 | 5600 | 5600 | 5600 |
| CRI | 91,5 | 91,5 | 91,5 | 91,5 | 91,5 |
| Center beam | 7688 lux | 4684 lux | 3284 lux | 2400 lux | 1880 lux |
| Light beam diameter | 1,30 mts | 1,70 mts | 1,90 mts | 2,10 mts | 2,30 mts |
| CCT | 3190 | 3190 | 3190 | 3190 | 3190 |
| CRI | 91,5 | 91,5 | 91,5 | 91,5 | 91,5 |

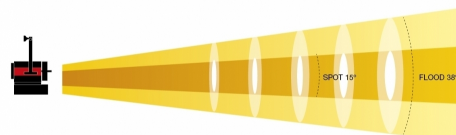


| FLOOD | | | | | |
|---------------------|----------|----------|----------|----------|----------|
| Distancia | 4 mts | 5 mts | 6 mts | 7 mts | 8 mts |
| Center beam | 2425 lux | 1550 lux | 1064 lux | 854 lux | 675 lux |
| Light beam diameter | 3,00 mts | 3,30 mts | 3,80 mts | 4,50 mts | 5,00 mts |
| CCT | 6150 | 6150 | 6150 | 6150 | 6150 |
| CRI | 91,5 | 91,5 | 91,5 | 91,5 | 91,5 |
| Center beam | 3065 lux | 1979 lux | 1315 lux | 995 lux | 760 lux |
| Light beam diameter | 3,00 mts | 3,30 mts | 3,80 mts | 4,50 | 5,00 |
| CCT | 3250 | 3250 | 3250 | 3250 | 3250 |
| CRI | 91,5 | 91,5 | 91,5 | 91,5 | 91,5 |

L 332mm (13.07")

W 333mm (13.11")

H 566mm (22.28")

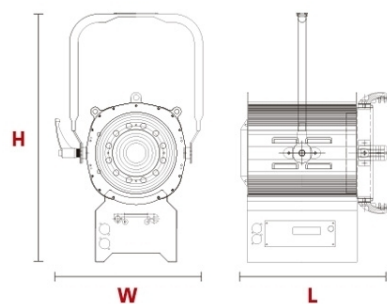

FORNECIDO COM:

- Barndoor 4-leaf.
- Filter frame.
- Safety grid.
- 3 m power supply cable.