

STUDIO FRESNEL LED 200W SINGLE COLOR 3200K° or 5600K°

FRESNELS LED

Fresnels LED 200W built with aluminum profiles and steel, on modern and compact design, ensuring maximum dissipation and lightweight. Leds available for 3200K° or 5600K°, offering high colour rendering average CRI>95 TLCl >96.

Efficient optical system uses high quality reflector and fresnel lens glass to ensure maximum lighting performance. Saves up to 85% in energy consumption compared to halogen fresnels and a considerable reduction of heat emission.

The FRESNEL LED can be controlled via DMX from the console or manually by a potentiometer located on the control panel of the same fresnel Led. The control panel has an LCD and buttons to set the display DMX address, also select the type of DMX-Manual control, allowing display the percentage of light output and the LED voltage, as well as the temperature inside the equipment and its system electronic, and other parameters.

They are equipped with high quality drivers.


Flicker free, and noiseless turbine, to ensure maximum extension of the lifetime of the LED.

Available models Manual and Pole Operated.

PHOTOMETRIC DATA

FRESNEL SPL-200

SPOT					
Distancia	4 mts	5 mts	6mts	7 mts	8 mts
Centerbeam	8150 lux	4930 lux	2740 lux	2100 lux	1512 lux
Lightbeam diameter	1,30 mts	1,70 mts	1,90 mts	2,10mts	2,30 mts
CCT	5600	5600	5600	5600	5600
CRI	95	95	95	95	95
Centerbeam	7098 lux	4894 lux	3384 lux	2400 lux	1880 lux
Lightbeam diameter	1,30 mts	1,70 mts	1,90 mts	2,10 mts	2,30 mts
CCT	3180	3180	3180	3180	3180
CRI	95	95	95	95	95

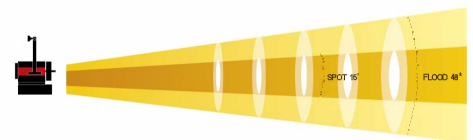


FLOOD					
Distancia	4 mts	5 mts	6mts	7 mts	8 mts
Centerbeam	2425 lux	1950 lux	1064 lux	854 lux	675 lux
Lightbeam diameter	3,00 mts	3,30 mts	3,80 mts	4,50 mts	5,00 mts
CCT	6150	6150	6150	6150	6150
CRI	95	95	95	95	95
Centerbeam	3065 lux	1879 lux	1315 lux	865 lux	700 lux
Light beam diameter	3,00 mts	3,30 mts	3,80 mts	4,50	5,00
CCT	3250	3250	3250	3250	3250
CAI	95	95	95	95	95

MODELOS

SPL-200/MO Manual Operation
SPL-200/PO Pole Operation

- High efficient led 200W.
- Power consumption: 200W.
- Power requirements: 90V-240V 50/60Hz.
- Control method: DMX or Local (manual) dimming.
- Colour temperature: 3200K° or 5600K°.
- Flicker Free.
- Fresnel lens Ø 6" (150mm)
- Powercom for power daisy chain.
- Warranty 2 years

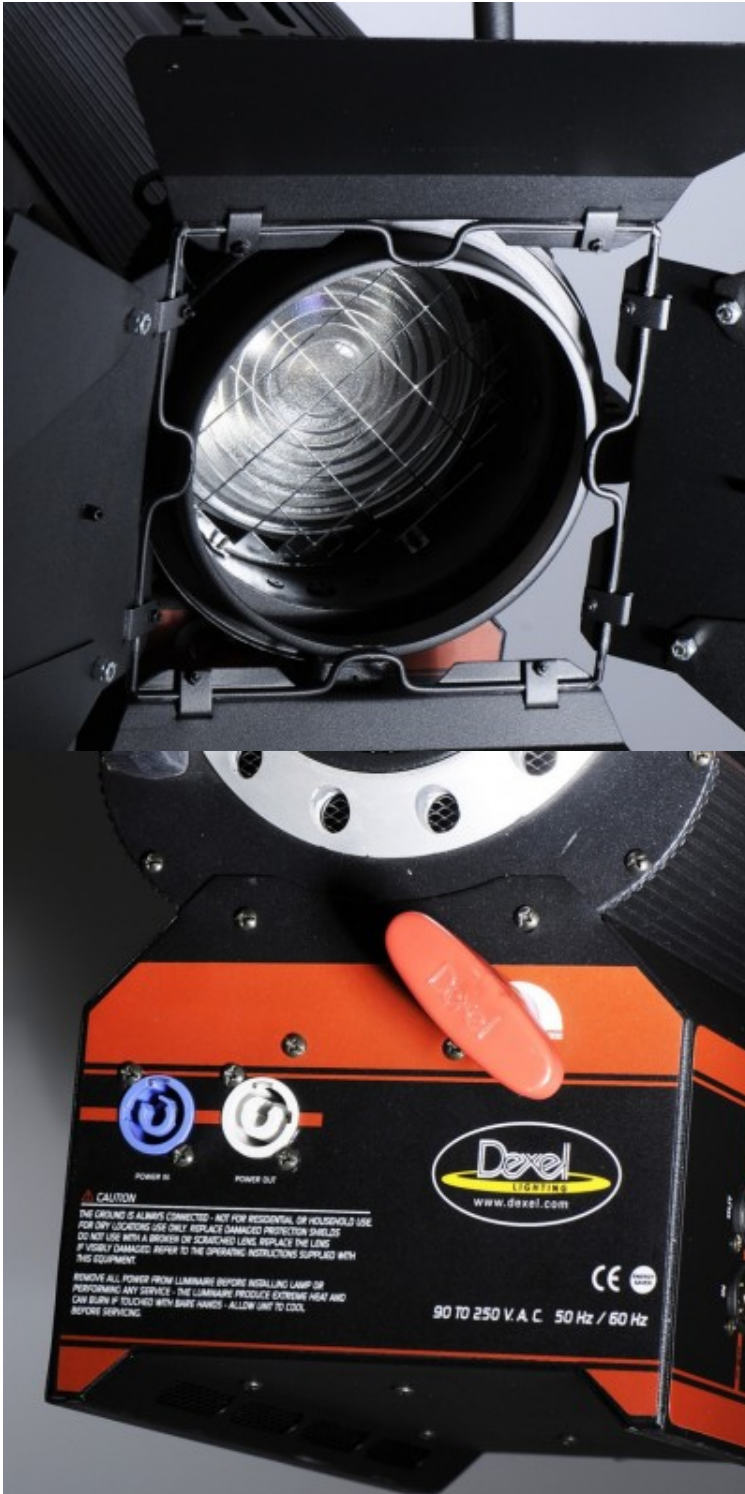

FORNECIDO COM:

- Barndoor 4-leaf.
- Filter frame.
- Safety grid.
- 2 m power supply cable.