




53-14 / 53-14/BI

LED ELLIPSOIDAL ZOOM 250W 15-30° SINGLE COLOUR OR BI-COLOUR

- High power COB led 250w CRI ≥ 98
- Colour temperature: 3200K° or variable white colour 2700K° to 6500K°
- Zoom 15-30°
- Dimming DMX or local (manual) dimming
- Flicker free
- Power consumption: 250w
- Power requirements: 90V-240V 50/60Hz


ACCESSORIES

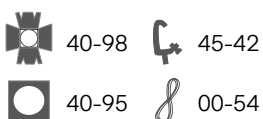

KIT CONTENTS

Lamphead
Filter holder
Gobo holder
Four shutters

DIMENSIONS

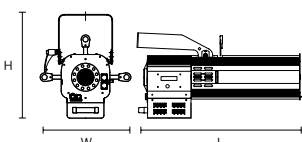


L 687mm (27.04")
W 376mm (14.8")
H 340mm (13.38")

PHOTOMETRIC DATA

SINGLE COLOR

Spot

Distance	5 mts	6 mts	8 mts	10 mts	12 mts
Center beam	8416 lux	5900 lux	3400 lux	2165 lux	1572 lux
Light beam Ø	1,10 mts	1,40 mts	1,90 mts	2,80 mts	2,80 mts

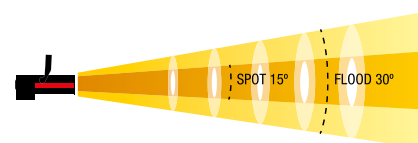


Flood

Distance	5 mts	6 mts	8 mts	10 mts	12 mts
Center beam	3500 lux	2450 lux	1380 lux	890 lux	600 lux
Light beam Ø	1,90 mts	2,30 mts	3,00 mts	3,80 mts	4,60 mts

BI-COLOR

Spot

Distance	5 mts	6 mts	7 mts
Center beam 6000K°	2210 lux	1320 lux	1030 lux
Center beam 2800K°	2207 lux	950 lux	707 lux
Light beam Ø	1,00 mts	1,50 mts	1,80 mts

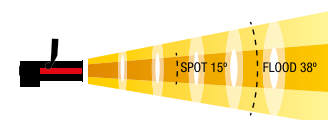

Flood

Distance	5 mts	6 mts	7 mts
Center beam 6000K°	390 lux	210 lux	115 lux
Center beam 2800K°	295 lux	145 lux	100 lux
Light beam Ø	2,60 mts	3,70 mts	4,60 mts